




TRUE FLEX DUCT COMMERCIAL TF2

TRUE FLEX (BARE) 2-PLY ALUMINUM DUCT- MODEL TF2

- Heavy Duty 2-ply Aluminum
- UL 181 Listed
- Class 0 Air Duct Material
- High Pressure Rated
- Quality Triple-Seam
- Lightweight Aluminum
- Excellent Bend Radius
- Air-Tight & Leak-Proof
- Self-Supporting
- Compressed for Easy Handling
- Extremely Dependable
- Custom Length Fabrication

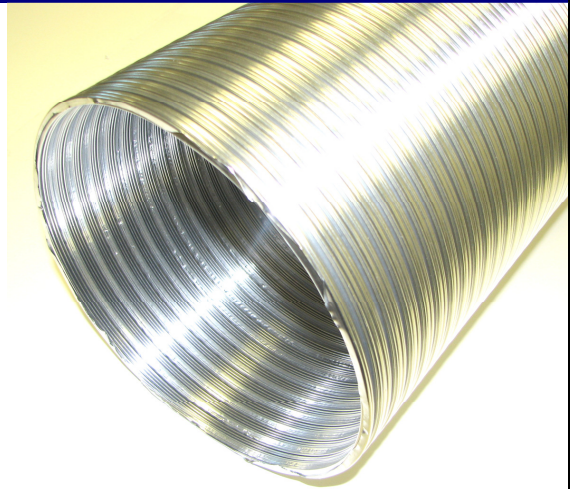

TECHNICAL INFORMATION:

Underwriters Laboratories Listed	UL 181 Class 0 Air Duct
Flame Spread - Smoke Developed	0/0
Positive Pressure (03" – 16")	12 in. WC
Positive Pressure (18" & 20")	6 in. WC
Negative Pressure (03" – 16")	10 in. WC
Negative Pressure (18" & 20")	4 in. WC
Velocity	5500 FPM
Operating Temperature	-20°F to +250°F



SUGGESTED SPECIFICATION:

Flexible ducting shall be Commercial (Bare) True Flex – Model TF2 by Peppertree Air Solutions Inc. Duct shall be manufactured from 2 continuous strips of spirally wound aluminum, mechanically interlocked to produce an air-tight and leak proof seam. The 2-ply construction creates a stronger, tougher and more durable flexible duct for those special applications. TL2 is UL-181 Listed as Class 0 Air Duct Material with a Flame Spread Rating of 0 without evidence of continued progressive combustion and a Smoke Developed Rating of 0.